


ACOUSTIC

Acoustic wall-mounted panel in a wide range of colours and sizes which allow its functional design to adapt to the needs of the space in question to create different compositions on walls, partitions, columns and other surfaces.




2 mounting options:

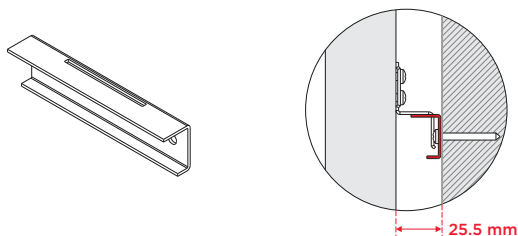

Individual mounting profiles

Mounted with 4 Z-clips fitted on the panel and fittings to screw to the wall. The choice of plugs/anchors depends on the characteristics of the vertical surface.

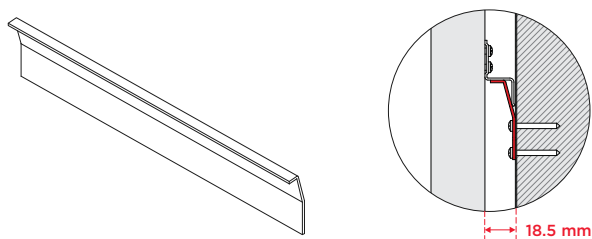


Continuous mounting profile

Mounted with 4 Z-clips fitted on the panel and 2 continuous profiles on the wall. The choice of plugs/anchors depends on the characteristics of the vertical surface.

ACOUSTIC

DESCRIPTION

STRUCTURE

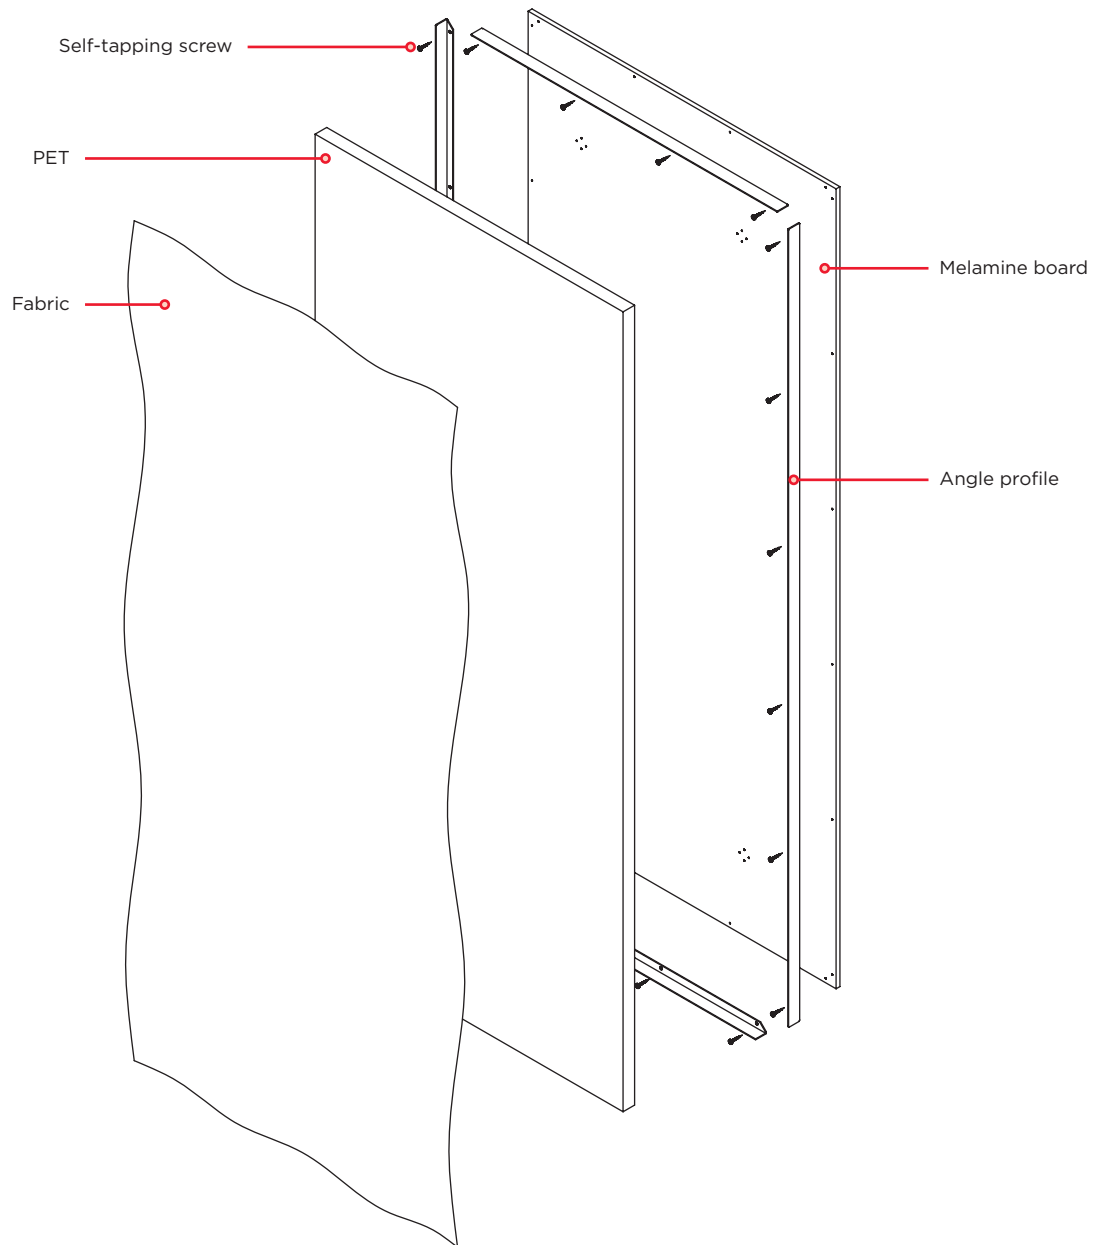

Total thickness: 40 mm. Made of a 10-mm melamine board onto which fire-retardant, absorbent material (PET) with excellent acoustic properties and a density of 60 kg/m^3 is fitted. Entire perimeter framed to maintain linearity all around. The sound-absorbing material is then covered with the chosen fabric, which is stapled on the back of the melamine board.


SOUND-ABSORBING

Weighted sound absorption coefficient $\alpha_w = 0.65 \text{ Mz}$.

ACOUSTIC

RANGE

ACOUSTIC WALL PANEL AND FIRE-RETARDANT ACOUSTIC WALL PANEL



A 200	H 200	1600
400	400	1800
600	600	2000
800	800	2200
900	1000	2400
1000	1200	
1200	1400	

WALL PANEL MOUNTING PROFILE

Individual profile



Continuous profile

