


## GINZA BENCH SEATING


### TECHNICAL DATA

- a Seat width
- A** Total width
- p Seat depth
- P** Total depth
- h Seat height
- H** Total height
- Kg Weight in Kg
- d Dimensions
- Mt Meters of cloth
- Mp Meters of leather

Bench without table and without arms.



a	58	<b>A</b>	62
p	50	<b>P</b>	62
h	45	<b>H</b>	79.4
Kg	20,40	d	
T	0.9		
P	1.0		



a	58	<b>A</b>	120
p	50	<b>P</b>	62
h	45	<b>H</b>	79.4
Kg	34,26	d	
T	1.80		
P	2.00		



a	58	<b>A</b>	178
p	50	<b>P</b>	62
h	45	<b>H</b>	79.4
Kg	47,87	d	
T	2.70		
P	3.00		



a	58	<b>A</b>	236
p	50	<b>P</b>	62
h	45	<b>H</b>	79.4
Kg	61,58	d	
T	3.60		
P	4.00		

### FEATURES

#### Bench Seating

- Modular 1, 2, 3 or 4 units and seats
- Optional arms on the ends
- Optional tables on the ends, both square and rectangular
- Wide range of lacquer, paint and wood finishes



## GINZA BENCH SEATING



### DESCRIPTION

Ribbed legs made from injected L-2520 aluminum, with a cross-section of approximately 50\*15. Open "C" shaped at the top where they are bolted onto the structure.

The frame consists of two 40x30x2mm steel pipes and 4 mm formed steel plate bolted onto the seat base and the wood fiber board (MD).

The entire structure receives a pre-treatment consisting in degreasing, washing and phosphating, followed by a coat of epoxy powder and a final polymerization process. This powder coating meets the current reaction to fire regulations UNE 23827; The bench is painted with epoxy powder paint and then oven polymerized at 180°, with a minimum thickness of 60 microns. It also includes floor support blocks made from polyamide.

Seat backs, fronts, sides and tables are manufactured from 20 mm wood fiber board (MD), with optional finishes in lacquer or wood veneer, which in turn comes with the option of tinted or varnished wood finishes.


The recessed seat back includes a cold-injection molded foam cushion with a density of 40 Kgrs/m<sup>3</sup>. This ergonomically-shaped cushion is a single piece on the seat back and seat with different thicknesses to ensure greater seat comfort. It is fastened onto the seat back and bolted onto the seat.

The arms come with an inner 30 mm wood fiber board (MD) frame, and are covered in foam and upholstered. Anchored with galvanized steel fasteners.


## GINZA BENCH SEATING

### RANGE


Bench without tables

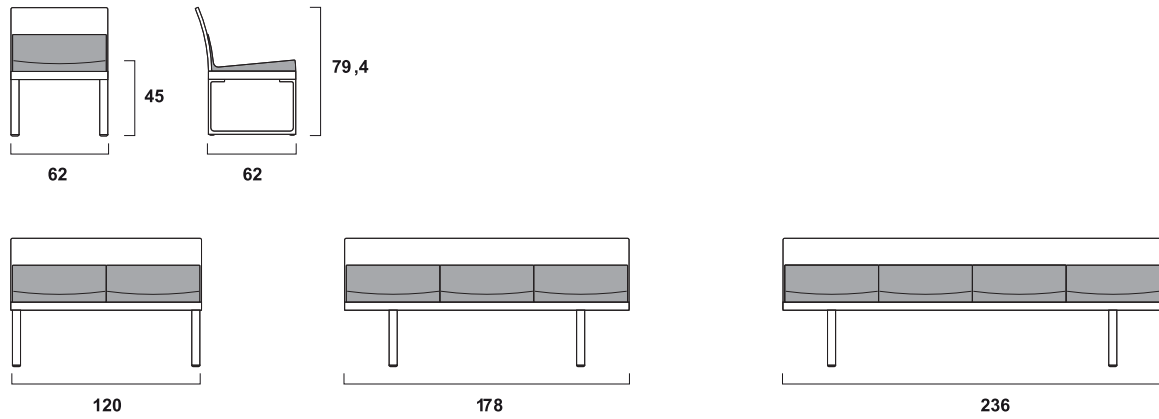

Bench with rectangular end tables

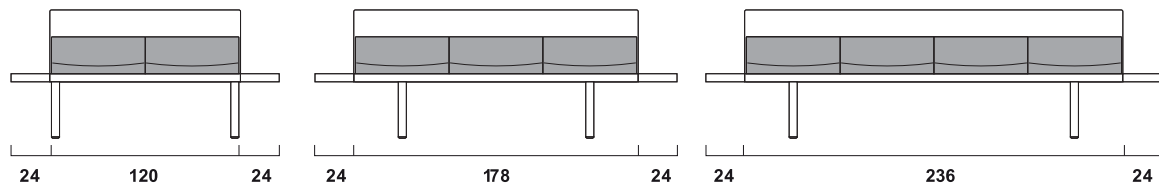

Bench with square end tables

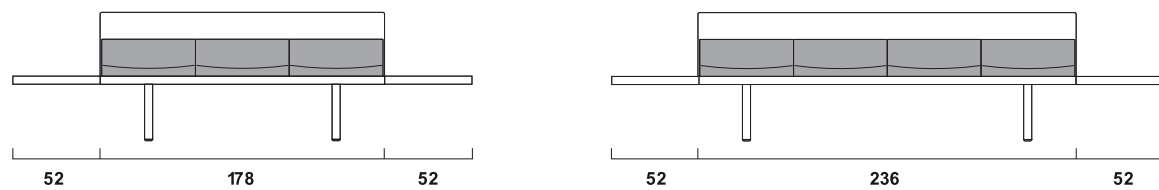

Coffe tables

