



CONIC MEETINGS


Its angled leg is the hallmark of the Conic table. Through their lightweight design, the legs accompany the organic shapes of the work top to give a homogeneous visual aesthetic to the entire assembly. The high quality with which the joints are solved make this programme a first-class solution for the work environment.



OPTIONAL FEATURES

CABLE MANAGEMENT CHANNEL

- Modular table channel with 2 height positions

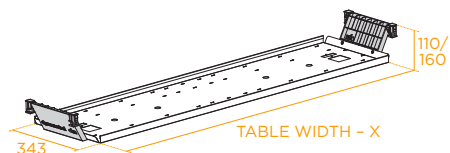


Middle table X= 268
Start/end table X= 468

ABS side covers in white (BA) with white (BA) structure.
In black (NE) for other structure colours.

TRAY

- 0.8-mm thick metal Independent table tray



Side flip-open cover X= 334
400 flip-open cover X= 509
800 flip-open cover X= 909

ABS side covers in white (BA) with white (BA) structure.
In black (NE) for other structure colours.


TECHNICAL SHEET



OPTIONAL FEATURES

CHANNEL ACCESSES


- Side flip-open cover *
Metal or same finish as work top
2-mm perimeter in black (NE)
Built-in sockets option



- Ø60 cable grommet *
White (BA) and black (NE)



- Central flip-open cover (opens on two sides) **
Metal or same finish as work top
2-mm perimeter in black (NE)




- Ø60 multi-connection socket **
White (BA) and black (NE)
1 power socket + 1USB A + 1USB C
+ 20 cm cable ending
in Wieland connector



* White (BA) access: White (BA) work top • Black (NE) access: Other work tops


** As per order

Positioning:

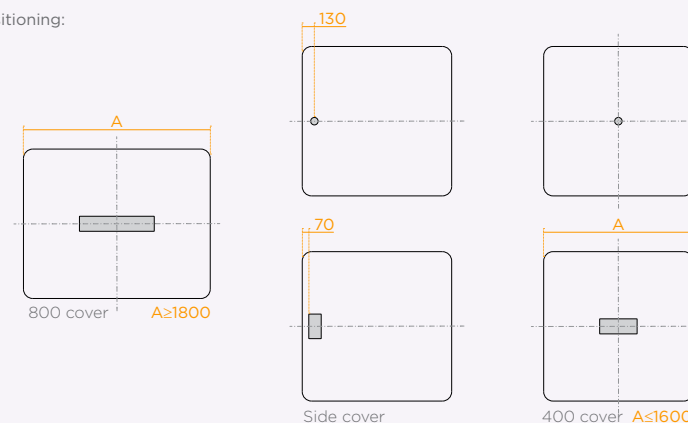

CABLE RISER


- Mesh




- Jointed



- Totem



- Access cover on middle leg



1-mm thick painted sheet metal



CONIC MEETINGS



DESCRIPTION

WORK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m³ as per EN 323.

- ▶ Laminate finish. 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished on top with 0.7-mm thick anti-fingerprint HPL as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished in wood treated with high-resistance varnish. 2-mm thick wood edge.

STRUCTURE



Metal frame built with two 1.5-mm thick 50x30 profiles as per UNE-EN 10305.

End legs built with 1.5-mm thick 50x30 upper steel crossbars as per UNE-EN 10305. Vertical cylindrical tube with a diameter of 50 mm which tapers down to d-25 mm. Option: castor with brake d-65 mm.

Metal middle leg on the group work stations built with slanted 1.5-mm thick 50x30 vertical profiles and two 1.5-mm thick 50x30 profiles as per UNE-EN 10305 welded to the leg.

60/80µm epoxy powder in compliance with current reaction to fire standard UNE 23827-90.


Leg levelling: 20 mm

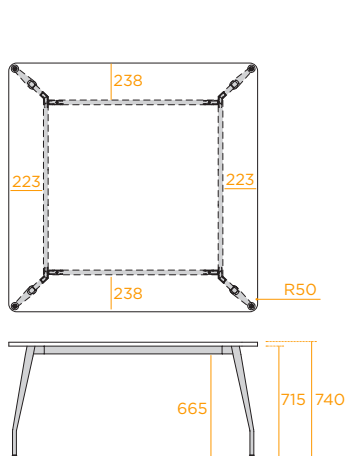

TECHNICAL SHEET



DETAILS



▲ FLIP-OPEN COVER
Side



▲ FLIP-OPEN COVER
Central (opens on two sides)



▲ CHANNEL ACCESS
Ø60 multi-connection
socket



▲ CHANNEL



▲ TRAY



▲ MIDDLE LEG
With access cover



CERTIFICATES

tecnaliacertified
PRODUCTOS CERTIFICADOS DE MOBILIARIO
RT 01 MOBILIARIO - MOF34
UNE-EN 15372




CONIC MEETINGS

TECHNICAL SHEET




RANGE

INDEPENDENT TABLE




W \ F	100	120	140	160	180	200	220	240
80	●	●	●	●	●	●		
90	●	●	●	●	●	●		
100	●	●	●	●	●	●	●	
120		●	●	●	●	●	●	●
140			●	●	●	●	●	●
160				●	●	●	●	●

MODULAR TABLE

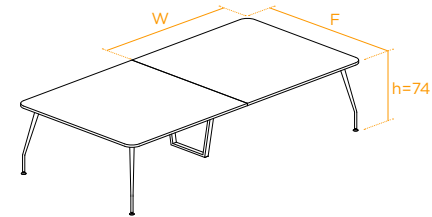


W \ F	120	140	160	180	200	220	240
120	●	●	●	●	●	●	●
140		●	●	●	●	●	●
160			●	●	●	●	●

ROUND TABLE




W \ F	100	120	140	160
100	●			
120		●		
140			●	
160				●

TRIANGULAR TABLE



W \ F	120	140	160
120	●		
140		●	
160			●

TRAPEZOIDAL TABLE



W \ F	120	140	160	180	200	220	240
120	●	●	●	●	●	●	●
140		●	●	●	●	●	●
160			●	●	●	●	●

KEY

PRICE TERMS

- GENERAL
- EXPRESS




CONIC MEETINGS

TECHNICAL SHEET




RANGE

BARREL TABLE




	W	180	200	220	240
F					
120		●	●	●	●
140		●	●	●	●
160		●	●	●	●

THREE-SIDED TABLE

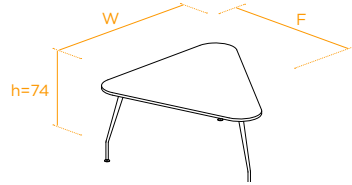


	W	160
F		
160		●

FOUR-SIDED TABLE

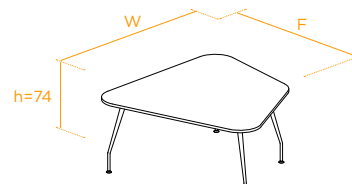


	W	160
F		
160		●

FIVE-SIDED TABLE

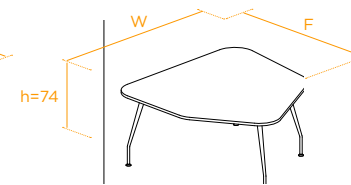


	W	160
F		
160		●

SIX-SIDED TABLE

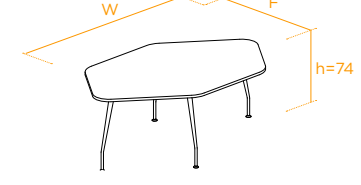


	W	200	240
F			
120		●	●

ELLIPTICAL TABLE

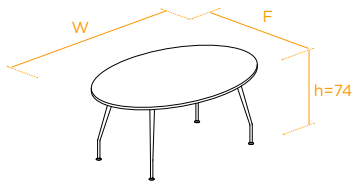


	W	180	200	220	240
F					
120		●	●	●	●
140		●	●	●	●
160		●	●	●	●

T2 TRAPEZOIDAL TABLE

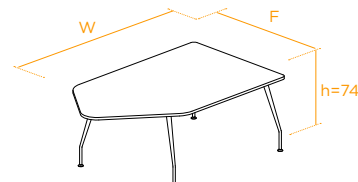


	W	160	200	240
F				
120		●	●	●
160		●	●	●

T2 DOUBLE TRAPEZOIDAL TABLE

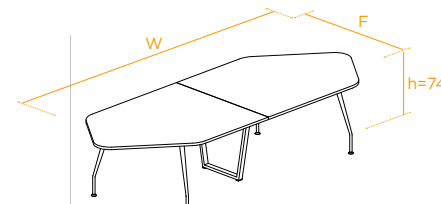

	W	320	400	480
F				
120		●	●	●

DOUBLE BARREL TABLE

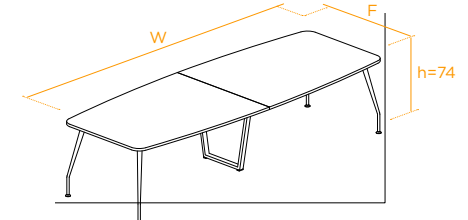

	W	320	400	480
F				
120		●	●	●
140		●	●	●
160		●	●	●

KEY

PRICE TERMS

- GENERAL
- EXPRESS

