




DOLMEN SHELVING

The Dolmen shelving unit maintains the visual language of the collection through its characteristic rounded sides and friendly shapes, which provide lightness and aesthetic coherence to the set. Its open design offers great versatility for storage and display, allowing the workspace to be organized in an orderly, functional, and sophisticated manner.

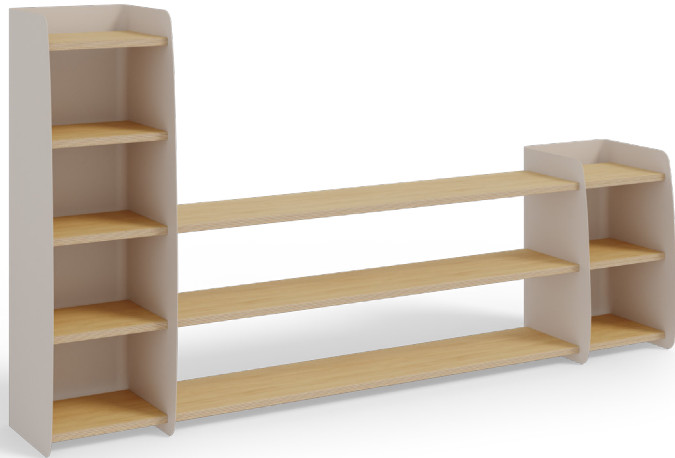

TECHNICAL SHEET



DESCRIPTION

ENCLOSURE

2 mm thick DC01 UNE-EN 10130 sheet metal shaped with a 40 mm radius on the rear corners.


These enclosures have 2 mm thick brackets welded onto them, to which the shelves are screwed.

The entire set is painted with 60/80 micron epoxy powder paint, complying with current fire reaction regulations UNE 23827-90.

SHELVES

- ▶ 30 mm birch core for HPL, LINOLEUM, and WOOD finishes with varnished edges.
- ▶ 30 mm thick wood particle board, glued with synthetic resins and specifically designed for applications requiring high resistance to bending, scratching, and staining, with an average density of 630 kg/m³ according to EN 14323. Bilaminated finish with 1 mm ABS edging according to UNE 56.843:01.

Initial/final modules:

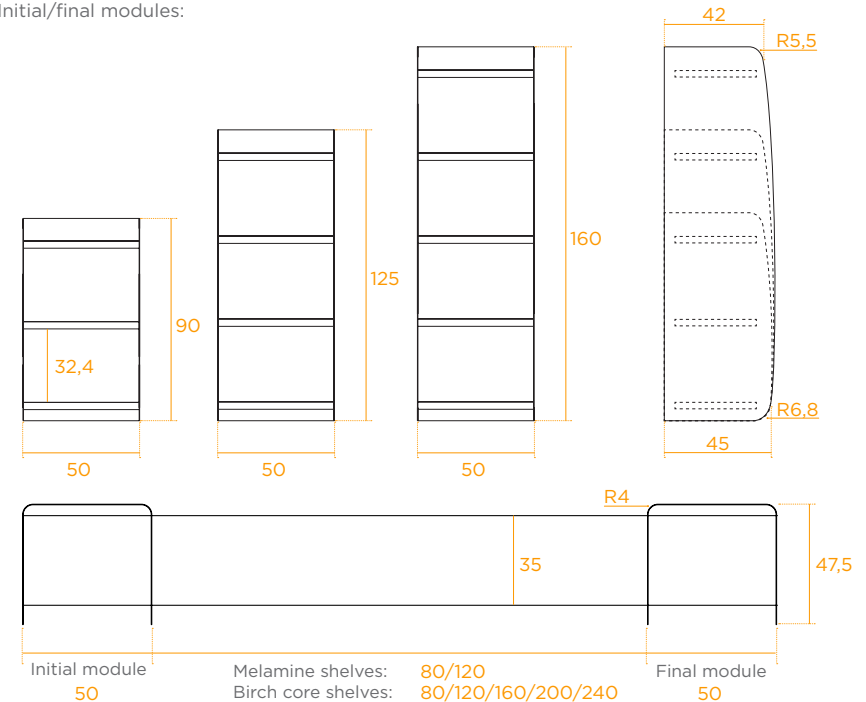




DOLMEN SHELIVING

TECHNICAL SHEET


RANGE

RECYCLABILITY RATE


▶ 90-90




▶ 90-125




▶ 90-160

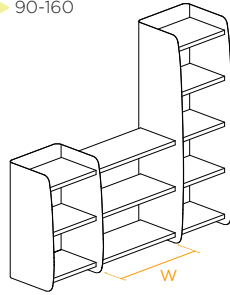


▶ 125-90




▶ 125-125




▶ 125-160

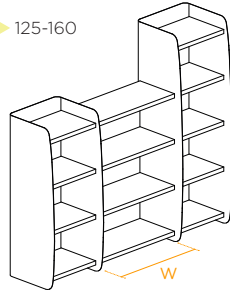


▶ 160-90



▶ 160-125



▶ 160-160

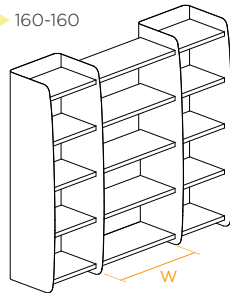

RECYCLED MATERIAL



RECYCLABLE

	W	80	120	160	200	240
Melamine shelves		●	●			
Birch core shelves		●	●	●	●	●

KEY
PRICE TERMS
● GENERAL