



## T-BOX STORAGE


Modular storage/filing system. Based on a main 80x40x40-cm module which allows for a wide variety of combinations.




### MODULES

► Modules stackable to a maximum of 4 tiers.

- 1 Open
- 2 Hinged door
- 3 Filing drawer
- 4 2 drawers
- 5 Open without rear (Not suitable for end columns)
- 6 Modules with castors



Front options: 3, 4

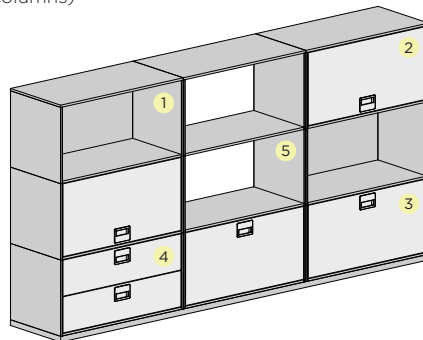


# TECHNICAL SHEET



### OPTIONAL FEATURES


#### TOP

► In 19-mm thick laminate.



#### PLINTH

► Individual or one for all.

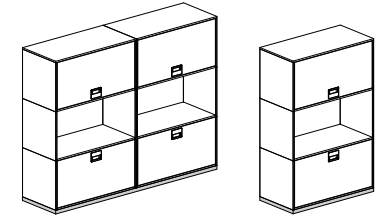

#### PULL


► With lock

► Without lock




#### CUSHION

► Upholstered assembly on module with castors.



### COUNTERWEIGHT


► Counterweight on plinth on compositions with filing drawers / 2 drawers on the 3rd tier.

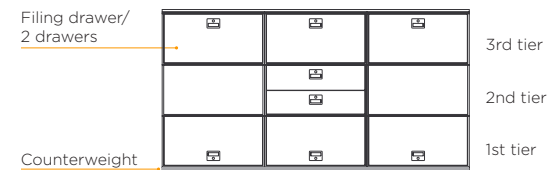

### PLANTER

► 19-mm thick laminate assembly

A= 800 (module 1)  
1600 (module 2)  
2400 (module 3)

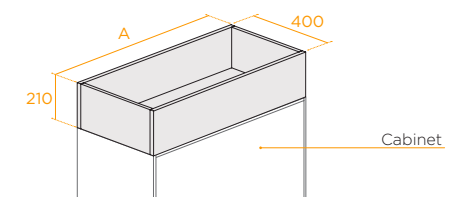



## T-BOX STORAGE



### DESCRIPTION

#### STRUCTURE

Single 0.8-mm thick shell, sides and rear, without visible joins. Double-structure sides in sheet steel.

Base welded to the shell with reinforcement on the front and 1.2-mm thick clip-on top screwed to the shell. Tie rod on top in 1.5-mm thick steel.

All in 0.8-mm thick DC01 sheet steel as per UNE-EN 10130.

60/80µm epoxy powder coating in compliance with current reaction to fire standard UNE 23827-90.

The modules are joined with screwed plates between modules at the last height.

#### FRONT

► Option of 0.8-mm thick DC01 **sheet steel**.

► **Laminate** option, 19-mm thick chipboard coated with decorative medium-density laminate.

ABS pull with built-in lock option.

Front options:

**Hinged and retractable door** - Slides on plastic guides embedded in the sides.

**Filing drawer and 2 drawers** - Anti-overturn system with counterweight. Extractable guides. Safety system which prevents two drawers being opened at the same time. Maximum position, 3rd tier. In this case, a counterweight is needed on the plinth.

-Los cajones se pueden llenar con un máximo de 10 kg.

-Los archivadores se pueden llenar con un máximo de 23 kg.

#### PLINTH

In 1.2-mm thick steel. Attached and clipped on with screws and floor contact via levellers.


Option with 40-cm diameter castors at the front and polyamide rollers at the back.

#### CUSHION


Upholstered assembly made of 40 kg/m<sup>3</sup> density foam with a thickness of 40 mm mounted on a 19-mm thick wooden support and screwed to the unit with 5 self-tapping screws.

# TECHNICAL SHEET

#### ► Basic module

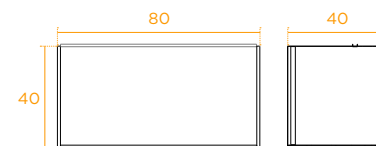


#### ► Module with castors

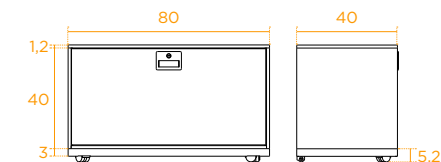


### RANGE

#### TOP




	W	80	160	240
A				
40		●	●	●
80		●	●	●

#### PLINTH



	W	80	160	240
A				
40		●	●	●

#### WITH CASTORS



	W	80
A		
40		●



### CERTIFICATES

**tecnaliacertified**  
PRODUCTOS CERTIFICADOS DE MOBILIARIO  
RT 01 MOBILIARIO - MCF34  
UNE-EN 14073 / UNE-EN 14074