

If you're looking for management furniture with simple, straight lines which can adapt to any type of space, that is the Tec programme. A system with a variety of finishes and cable management solutions which encourage communication and personal interaction.



### **OPTIONAL FEATURES**

### MODESTY PANEL




### TRAY

▶0.8-mm thick metal For flip-open cover or cable grommet

ABS side covers in white (BA) with white (BA) structure. In black (NE) for other structure colours.

### CABLE MANAGEMENT CHANNEL

► Single, hinged



ABS side covers in white (BA) with white (BA) structure. In black (NE) for other structure colours.

## TECHNICAL SHEET

### **OPTIONAL FEATURES**

### **CHANNEL ACCESSES**





▶Ø80 cable grommet \* White (BA) and black (NE)



► Metal flip-open cover \*\* 2-mm perimeter in black (NE) Built-in sockets option


▶Ø80 multi-connection socket \*\* White (BA) and black (NE) 1 power socket + 1USB C



+ 20 cm cable ending in Wieland connector

\* White (BA) access: White (BA) work top • Black (NE) access: Other work tops

\*\* As per order

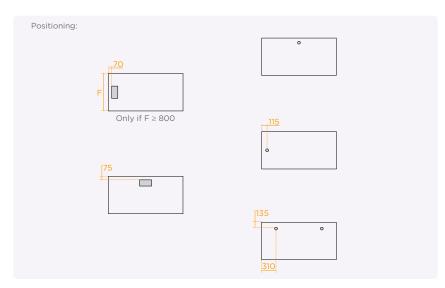

### CABLE RISER



Jointed to channel



Mesh to channel







## TECHNICAL SHEET



### **DESCRIPTION**

#### WORK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m3 as per EN 323.

- Laminate finish. 2-mm thick ABS edge as per UNE 56.843:01.
- Finished on top with 0.7-mm thick anti-fingerprint HPL as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm thick ABS edge as per UNE 56.843:01.
- Finished in wood treated with high-resistance varnish. 2-mm thick wood edge.

### STRUCTURE

Metal frame built with two 1.5-mm thick 50x30 steel profiles as per UNE-EN 10305.

Metal end legs built with 2-mm thick 50x50 profiles as per UNE-EN 10305.  $60/80\mu m$  epoxy powder in compliance with current reaction to fire standard UNE 23827-90.

Leg levelling: 20 mm



### DETAILS



▲ FLIP-OPEN COVER



FLIP-OPEN COVER Polyamide



▲ CHANNEL ACCESS Ø80 multi-connection



CHANNEL Single, hinged

### CERTIFICATES








# TECHNICAL SHEET



RANGE

### INDIVIDUAL DESK



F W	100	120	140	160	180	200
60	•	•	•	•	•	•
80	•	•	•	•	•	•
100	•	•	•	•	•	•

### RETURN



F W	80	100	120
60	•	•	•



