




# TEC MEETINGS


If you're looking for furniture with endless configuration options and diversity in its solutions for workspaces, that is the Tec programme. A highly adaptable open system that seeks to respond to layouts which favour communication, personal attention and the exchange of ideas between the members of the group.

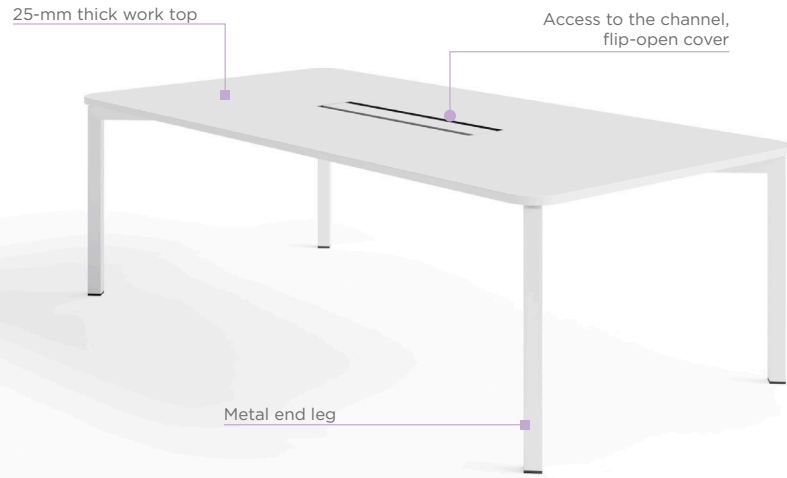

## OPTIONAL FEATURES

### CABLE MANAGEMENT CHANNEL

- ▶ Modular table channel with 2 height positions

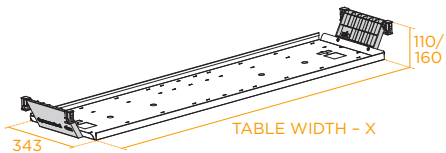


Middle table X= 268  
Start/end table X= 468

ABS side covers in white (BA) with white (BA) structure. In black (NE) for other structure colours.

### TRAY

- ▶ 0.8-mm thick metal Independent table tray



Side flip-open cover X= 334  
400 flip-open cover X= 509  
800 flip-open cover X= 909


ABS side covers in white (BA) with white (BA) structure. In black (NE) for other structure colours.

# TECHNICAL SHEET

## OPTIONAL FEATURES

### CHANNEL ACCESSES


- ▶ Side flip-open cover \*  
Metal or same finish as work top  
2-mm perimeter in black (NE)  
Built-in sockets option



- ▶ Ø80 cable grommet \*  
White (BA) and black (NE)



- ▶ Central flip-open cover (opens on two sides) \*\*  
Metal or same finish as work top  
2-mm perimeter in black (NE)




- ▶ Ø80 multi-connection socket \*\*  
White (BA) and black (NE)  
1 power socket + 1 USB C  
+ 1 m cable ending in Wieland connector






\* White (BA) access: White (BA) work top + Black (NE) access: Other work tops \*\* As per order

Positioning:

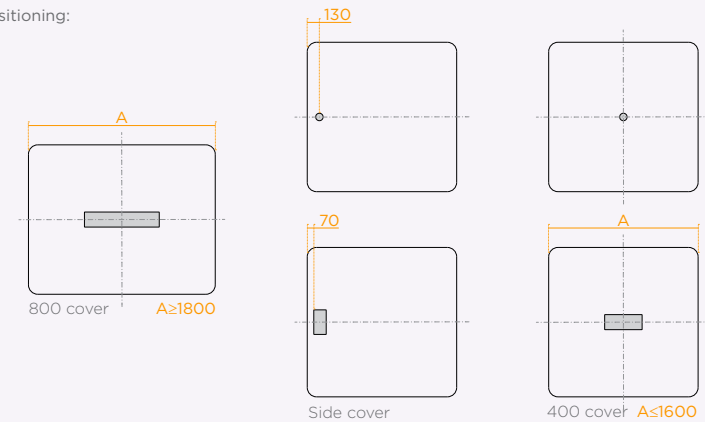

### CABLE RISER

- ▶ Magnetic ▶ Jointed ▶ Mesh ▶ Totem ▶ Access cover on middle leg



1-mm thick painted sheet metal





# TEC MEETINGS



## DESCRIPTION

### WORK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m<sup>3</sup> as per EN 323.

- ▶ Laminate finish. 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished on top with 0.7-mm thick anti-fingerprint HPL as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished in wood treated with high-resistance varnish. 2-mm thick wood edge.

### STRUCTURE


Metal frame built with two 1.5-mm thick 50x30 steel profiles as per UNE-EN 10305.

Metal end legs built with 2-mm thick 50x50 profiles as per UNE-EN 10305.

Metal middle leg on the group work stations built with 1.5-mm thick 50x30 vertical profile and two 1.5-mm thick 50x30 profiles as per UNE-EN 10305 welded to the leg.

60/80µm epoxy powder in compliance with current reaction to fire standard UNE 23827-90.


Leg levelling: 20 mm

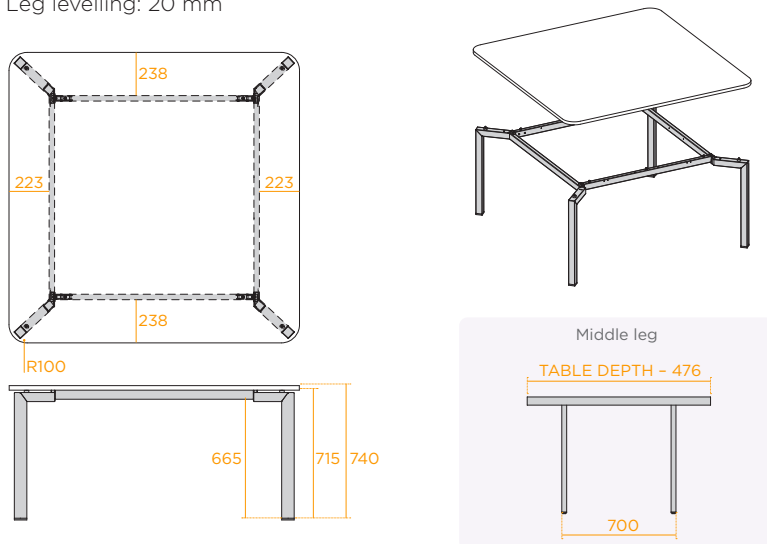

# TECHNICAL SHEET



## DETAILS



▲ FLIP-OPEN COVER  
Side



▲ FLIP-OPEN COVER  
Central (opens on two sides)



▲ CHANNEL ACCESS  
Ø80 multi-connection  
socket



▲ CHANNEL



▲ TRAY



▲ MIDDLE LEG  
With access cover




## CERTIFICATES






RANGE

INDEPENDENT TABLE



MODULAR TABLE

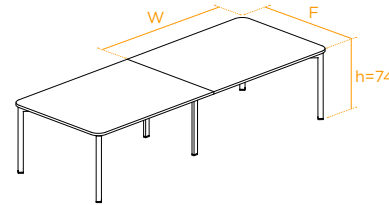

W \ F	100	120	140	160	180	200	220	240
80	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲		
90	●	●	●	●	●	●		
100	●	●	●	●	●	●	●	
120		●	●	●	●	●	●	● ▲
140			●	●	●	●	●	●
160				● ▲	● ▲	● ▲	● ▲	● ▲

W \ F	120	140	160	180	200	220	240
120	●	●	●	●	●	●	●
140		●	●	●	●	●	●
160			●	●	●	●	●

KEY

PRICE TERMS

- GENERAL
- EXPRESS

AVAILABLE OPTIONS

- ▲ h= 90 / 105