




TEC MEETINGS


If you're looking for furniture with endless configuration options and diversity in its solutions for workspaces, that is the Tec programme. A highly adaptable open system that seeks to respond to layouts which favour communication, personal attention and the exchange of ideas between the members of the group.

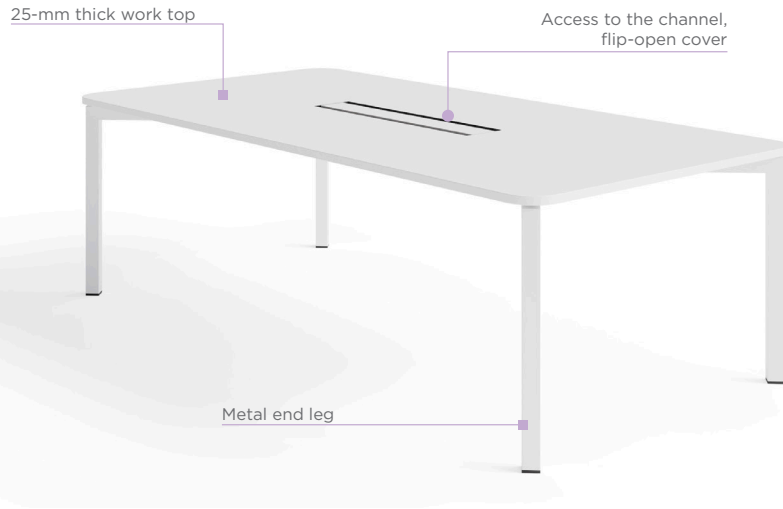

OPTIONAL FEATURES

CABLE MANAGEMENT CHANNEL

- Modular table channel with 2 height positions

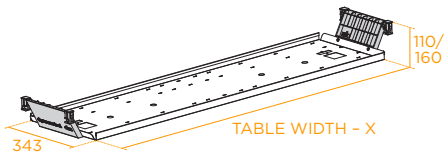


Middle table X= 268
Start/end table X= 468

ABS side covers in white (BA) with white (BA) structure.
In black (NE) for other structure colours.

TRAY

- 0.8-mm thick metal
Independent table tray



Side flip-open cover X= 334
400 flip-open cover X= 509
800 flip-open cover X= 909

ABS side covers in white (BA) with white (BA) structure.
In black (NE) for other structure colours.


TECHNICAL SHEET




OPTIONAL FEATURES

CHANNEL ACCESSES


- Side flip-open cover *
Metal or same finish as work top
2-mm perimeter in black (NE)
Built-in sockets option



- Ø80 cable grommet *
White (BA) and black (NE)



- Central flip-open cover
(opens on two sides) **
Metal or same finish as work top
2-mm perimeter in black (NE)








- Ø80 multi-connection socket **
White (BA) and black (NE)
1 power socket + 1USB C
+ 20 cm cable ending in Wieland connector



* White (BA) access: White (BA) work top • Black (NE) access: Other work tops




** As per order

Positioning:



CABLE RISER

- Magnetic
- Jointed
- Mesh
- Totem
- Access cover on middle leg



1-mm thick painted sheet metal



TEC MEETINGS



DESCRIPTION

WORK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m³ as per EN 323.

- Laminate finish. 2-mm thick ABS edge as per UNE 56.843:01.
- Finished on top with 0.7-mm thick anti-fingerprint HPL as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm thick ABS edge as per UNE 56.843:01.
- Finished in wood treated with high-resistance varnish. 2-mm thick wood edge.

STRUCTURE




Metal frame built with two 1.5-mm thick 50x30 steel profiles as per UNE-EN 10305.

Metal end legs built with 2-mm thick 50x50 profiles as per UNE-EN 10305.

Metal middle leg on the group work stations built with 1.5-mm thick 50x30 vertical profile and two 1.5-mm thick 50x30 profiles as per UNE-EN 10305 welded to the leg.

60/80µm epoxy powder in compliance with current reaction to fire standard UNE 23827-90.


Leg levelling: 20 mm

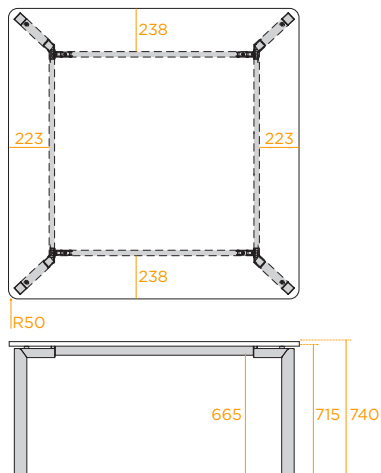

TECHNICAL SHEET



DETAILS



▲ FLIP-OPEN COVER
Side



▲ FLIP-OPEN COVER
Central (opens on two sides)



▲ CHANNEL ACCESS
Ø80 multi-connection
socket



▲ CHANNEL



▲ TRAY



▲ MIDDLE LEG
With access cover




CERTIFICATES






RANGE

INDEPENDENT TABLE



W \ F	100	120	140	160	180	200	220	240
80	● ▲	● ▲	● ▲	● ▲	● ▲	● ▲		
90	●	●	●	●	●	●		
100	●	●	●	●	●	●	●	
120		●	●	●	●	●	●	● ▲
140			●	●	●	●	●	●
160				● ▲	● ▲	● ▲	● ▲	● ▲

MODULAR TABLE

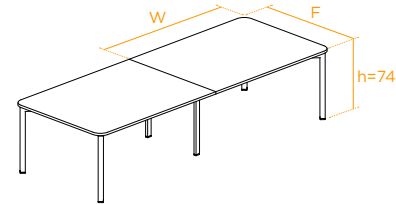

W \ F	120	140	160	180	200	220	240
120	●	●	●	●	●	●	●
140		●	●	●	●	●	●
160			●	●	●	●	●

KEY

PRICE TERMS

- GENERAL
- EXPRESS

AVAILABLE OPTIONS

- ▲ h= 90 / 105