




## VIRA SLIDING DESK


With its slanted wooden or metal legs as its hallmark and harmonious finishes, the friendly shapes of this work desk-cum-table follow the aesthetic of the current market.

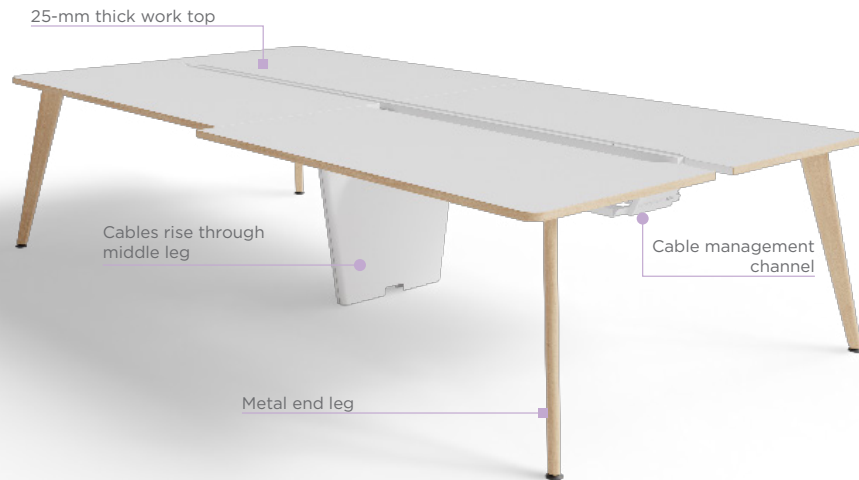

### OPTIONAL FEATURES


#### MODESTY PANEL

- 0.8-mm thick steel
- 16-mm thick melamine

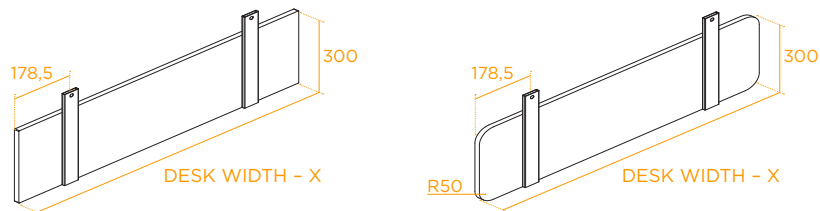

#### TYPE B MODESTY PANEL

- 0.8-mm thick steel

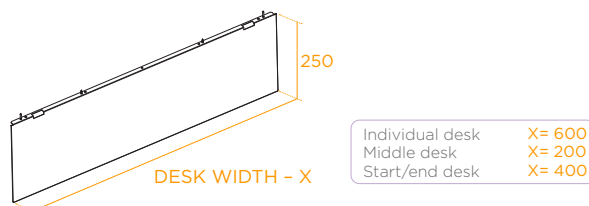


# TECHNICAL SHEET




### OPTIONAL FEATURES

#### CABLE MANAGEMENT CHANNEL

- Single, fixed

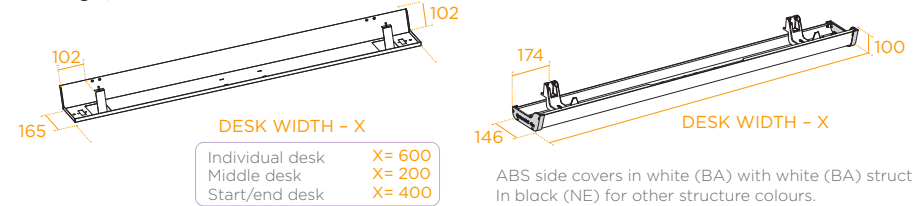

- Double with 2 height positions

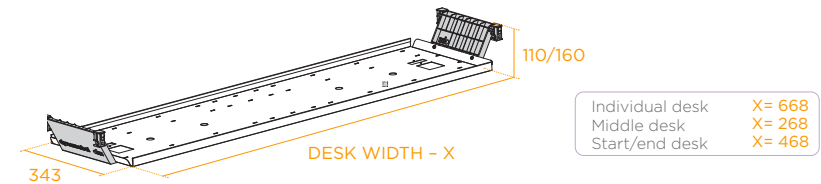

#### CHANNEL ACCESSES


- Ø60 cable grommet \*

White (BA) and black (NE)



- Ø60 multi-connection socket \*\*


White (BA) and black (NE)  
1 power socket + 1USB A + 1USB C  
+ 20 cm cable ending in  
Wieland connector



\* White (BA) access: White (BA) work top • Black (NE) access: Other work tops

\*\* As per order

#### POSITIONING:

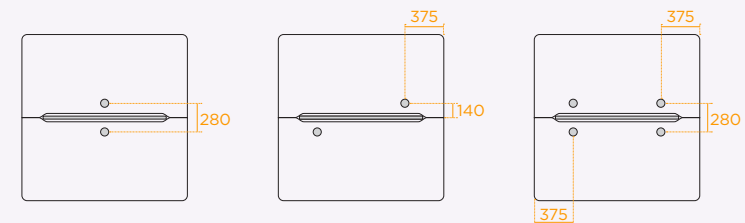



# VIRA SLIDING DESK




## OPTIONAL FEATURES

### CABLE RISER

► Jointed to channel




► Mesh to channel




INDIVIDUAL WORK STATION

► Totem to floor




► Access cover on middle leg

Individual




Bench



1-mm thick painted sheet metal

GROUP WORK STATION


Bench middle leg




Individual middle leg



## DIMENSIONS








### INDIVIDUAL DESK\*

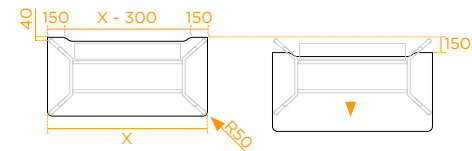

\*Front panels not supported.

X= Desk width

### DESK IN ROWS / BENCH

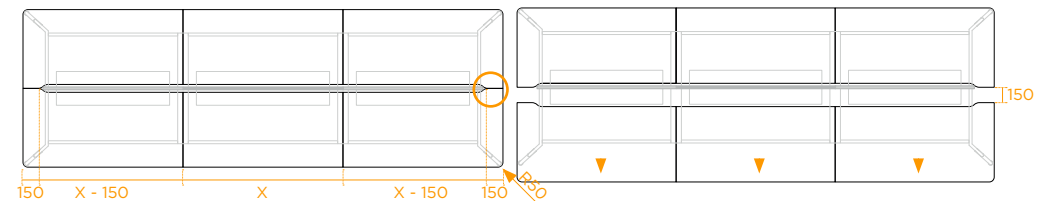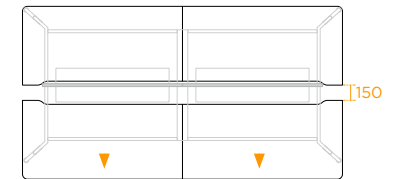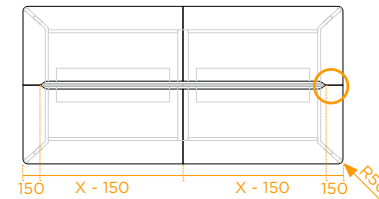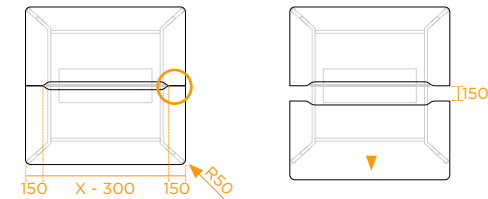



## VIRA SLIDING DESK



### DESCRIPTION

#### WORK TOP

Rectangular top with groove on the edge for cable routing made of 25-mm thick chipboard bonded with synthetic resins, specially designed for applications that require high bending strength. Average density: 620/595 kg/m<sup>3</sup> as per EN 323.

Laminate surface finish. 2-mm thick ABS edge as per UNE 56.843:01.

The top is attached to the legs with sliding guides made of 1.5-mm thick DC01 sheet steel. These guides allow the top to be moved 155 mm via POM bushings for frictionless gliding.

There is a top-locking system mounted on the right-hand underside of the top. Made of 3-mm thick DC01 sheet steel.

The slide guides and locking system are coated with 60/80µm epoxy powder compliant with current reaction to fire standard UNE 23827-90 in the same colour as the structure.

#### STRUCTURE

Metal frame built with two 1.5-mm thick 50x30 steel profiles as per UNE-EN 10305.

Metal end legs built with 1.5-mm thick 50x30 vertical profiles and 2-mm thick 50x40 upper crossbar profiles as per UNE-EN 10305.

Metal middle leg on group work stations built with 1.5-mm thick 50x30 vertical profiles and two 1.5-mm thick 50x30 profiles as per UNE-EN 10305 welded to the verticals.

On face-to-face work stations, there is an additional central profile made of 30x30x2 steel tubing per UNE-EN 10305 attached to the legs. This profile allows the same central screens as those on face-to-face work stations without sliding tops to be mounted.


60/80µm epoxy powder coating in compliance with current reaction to fire standard UNE 23827-90.

Leg levelling: 20 mm

## TECHNICAL SHEET



### DETAILS



▲ FLIP-OPEN COVER  
Metal



▲ FLIP-OPEN COVER  
Polyamide



▲ CHANNEL ACCESS  
Ø80 multi-connection  
socket



▲ CHANNEL  
Double



▲ CHANNEL  
Single, fixed



▲ CHANNEL  
Single, hinged



▲ MIDDLE LEG



▲ MIDDLE LEG  
With access cover



▲ SLIDING TABLETOP



### RECYCLABILITY RATE

Independent Vira  
with metal leg



Independent Vira  
with wooden leg



Facing Vira with  
metal legs



Facing Vira with  
wooden legs






## VIRA SLIDING DESK

# TECHNICAL SHEET




### RANGE

#### INDIVIDUAL DESK




W \ F	80	100	120	140	160	180	200
60	•	•	•	•	•	•	•
70	•	•	•	•	•	•	•
80	•	•	•	•	•	•	•
100		•	•	•	•	•	•

#### DESK IN ROWS

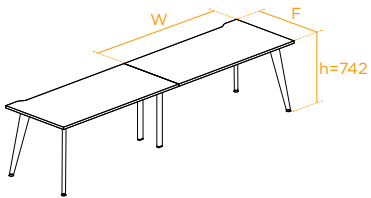

W \ F	80	100	120	140	160	180	200
60	•	•	•	•	•	•	•
70	•	•	•	•	•	•	•
80	•	•	•	•	•	•	•

#### BENCH

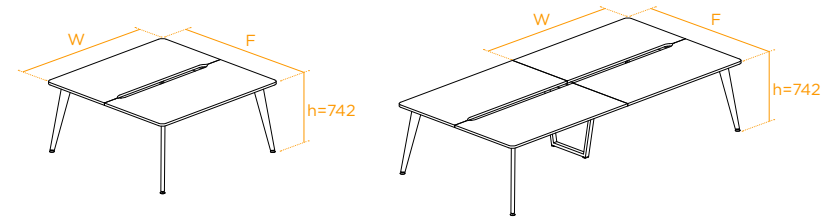

W \ F	120	140	160	180	200
120	•	•	•	•	•
140	•	•	•	•	•
160	•	•	•	•	•