




TEC MEETINGS


If you're looking for furniture with endless configuration options and diversity in its solutions for workspaces, that is the Tec program. A highly adaptable open system that seeks to respond to layouts which favour communication, personal attention and the exchange of ideas between the members of the group.

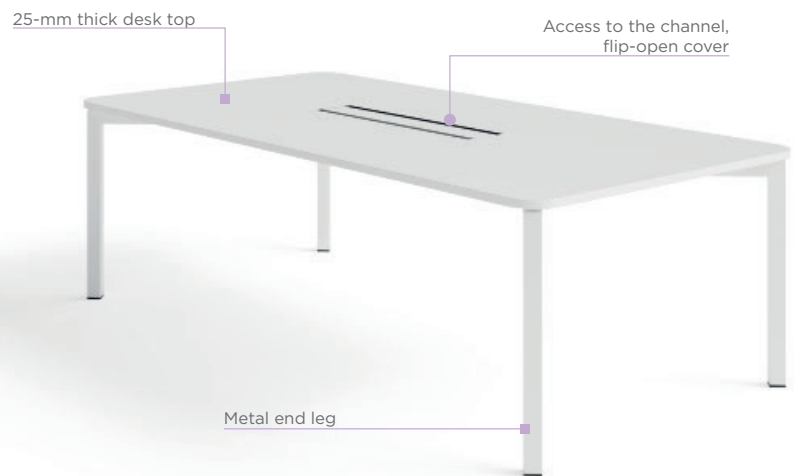

OPTIONAL FEATURES

CABLE MANAGEMENT CHANNEL


► Independent table tray



Side cover	X= 334
400 cover	X= 509
800 cover	X= 909

ABS side covers in white (BA) and black (NE)

► Modular table channel with 2 height positions

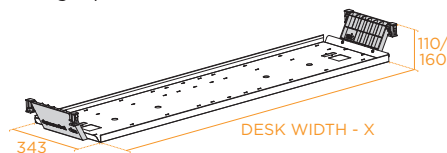

Middle desk	X= 268
Start/end desk	X= 468

TECHNICAL SHEET




OPTIONAL FEATURES

CHANNEL ACCESSES

► Side flip-open cover

Metal or same finish as work top
2-mm perimeter in black
Built-in sockets option




► Ø 80 cable grommet
Colour: white (BA) and black (NE)



► Central flip-open cover (double rotation)

Metal or same finish as work top
2-mm perimeter in black




► Ø 80 multi-connection socket



Colour: white (BA) and black (NE)
1 power socket + 1USB A + 1m cable ending in Wieland connector





Positioning:



800 cover A ≥ 1800




Side cover



400 cover A ≤ 1600

CABLE RISER


► Magnetic




► Vertebrated



► Totem



► Access cover on middle leg



1-mm thick painted sheet metal



TEC MEETINGS



DESCRIPTION

DESK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m³ as per EN 323.

- ▶ Laminated finish. 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished on top with 0.7-mm thick anti-fingerprint HPL as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished in wood treated with high-resistance varnish. 2-mm thick wood edge.


STRUCTURE

Metal frame built with two 1.5-mm thick 50x30 profiles.

Metal end leg with leveller, built with 2-mm thick 50x50 profile with plastic levelling studs. Option: castor with brake d-65 mm.

Middle metal leg with leveller on the group work stations, built with inclined legs made of 1.5-mm thick 50x30 profile and two 1.5-mm thick 50x30 profiles welded to the leg.

60/80 micras epoxy powder coated that complies with current UNE 23827-90 reaction to fire regulations.

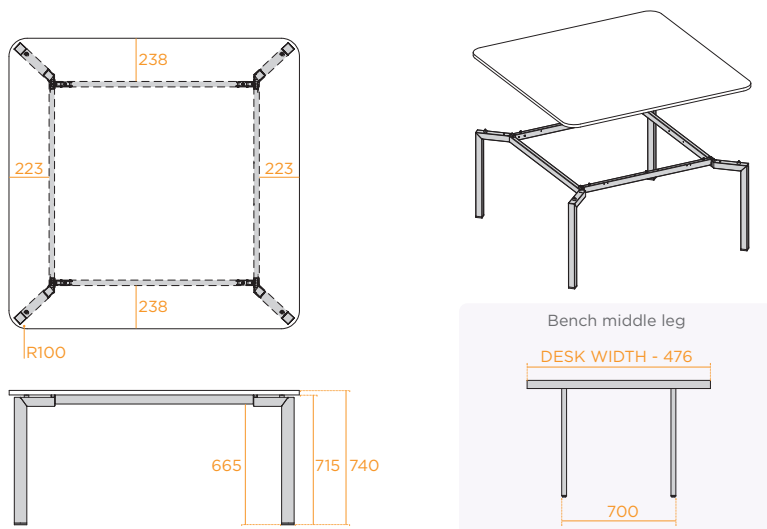

DETAILS



▲ SIDE FLIP-OPEN COVER



▲ CENTRAL FLIP-OPEN COVER
(double rotation)



▲ CHANNEL ACCESS
Ø 80 multi-connection
socket



▲ CHANNEL



▲ TRAY



▲ MIDDLE LEG
With access cover



CERTIFICATES






TEC
MEETINGS

TECHNICAL SHEET




RANGE

INDEPENDENT TABLE



W \ F	80	100	120	140	160	180	200	220	240
80	●	●	●	●	● ■ ▲	● ■ ▲	●		
90	●	●	●	●	●	● ■	●		
100		●	●	●	●	●	● ■	●	
120			●	●	●	●	●	●	● ■ ▲
140				●	●	●	●	●	●
160					● ■ ▲	●	●	●	●

MODULAR TABLE

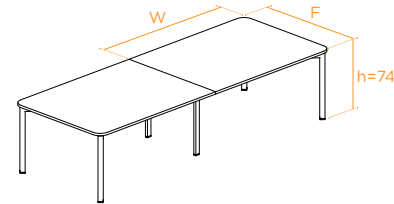

W \ F	120	140	160	180	200	220	240
120	●	●	●	●	●	●	● ■ ▲
140		●	●	●	●	●	●
160			● ■ ▲	●	●	●	●

KEY

PRICE TERMS

- GENERAL
- EXPRESS

AVAILABLE OPTIONS

- With castors
- ▲ h= 90 / 105