



VIVA MEETINGS

A wide range of sizes, heights and table-top shapes make this table the best choice to blend in anywhere. Its clean, well-defined lines reduce this table to the minimal expression and make it functional and timeless at the same time.




OPTIONAL FEATURES

CHANNEL ACCESSSES

Only available on tables with diameter ≥ 1000 mm



► Central flip-open cover

Metal or same finish as work top
2-mm perimeter in black
Built-in sockets option



► Polyamide flip-open cover

Colour: white (BA) and
black (NE)



Metal channel when there is a flip-open cover.

► Ø 60 / Ø 80 cable grommet

Colour: white (BA) and
black (NE)



► Ø 80 multi-connection socket

Colour: white (BA) and
black (NE)
1 power socket + 1USB A + 1m
cable ending in Wieland connector



► Ø 60 multi-connection socket

Colour: white (BA) and
black (NE)
1 power socket + 1USB A + 1USB C
+ 1m cable ending in Schuko
connector



TECHNICAL SHEET



DESCRIPTION

DESK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m³ as per EN 323.

► Laminated finish. 2-mm thick ABS edge as per UNE 56.843:01.

► Finished on top with 0.7-mm thick anti-fingerprint HPL as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm thick ABS edge as per UNE 56.843:01.


► Finished in wood treated with high-resistance varnish. 2-mm thick wood edge.

STRUCTURE

Cylindrical metal leg made of 3-mm thick tube with a diameter of 127 mm as per DIN2394 ST44 on tables with diameter > 800 mm and 3-mm thick tube with a diameter of 70 mm DIN2394 ST44 on tables with diameter ≤ 800 mm, with flat bars welded to the top and bottom which screw onto the structure and base.

The base, with 3 spokes on tables with a diameter of 600 to 800 mm and 4 spokes on tables with diameter > 800 mm, is a welded assembly consisting of 2.5-mm thick folded sheet-metal omega profiles (DC01 UNE-EN10130) welded to spokes made of 4-mm thick sheet metal (DC01 UNE-EN10130).

60/80 micras epoxy powder coated that complies with current UNE 23827-90 reaction to fire regulations.

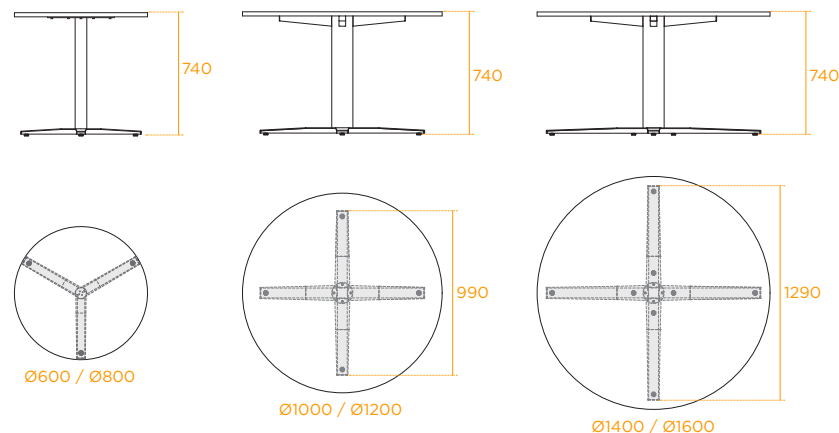




**VIVA
MEETINGS**



RANGE

ROUND TABLE

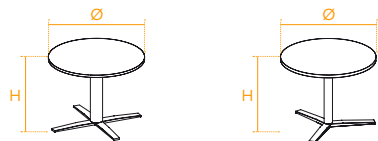

4 spokes



3 spokes

Ø H	60	80	100	120	140	160
75	●	●	●	●	●	●
90	●					
105	●					
⊗ ⊕	3	3	4	4	4	4

KEY

PRICE TERMS

- GENERAL
- SME

⊕ The tables have 3 or 4 spokes depending on the width of the table top.


TECHNICAL SHEET



DETAILS



▲ FLIP-OPEN COVER
Metal



▲ FLIP-OPEN COVER
Melamine
Same finish as work top



▲ CHANNEL ACCESS
Ø 60 multi-connection
socket



▲ 4-SPOKE BASE



▲ 3-SPOKE BASE



▲ CHANNEL ACCESS
Ø 80 multi-connection
socket



RECYCLABILITY RATE

94,97 %



CERTIFICATES

