

VIRA, MANAGEMENT DESK WITH PROPPED MEETING TABLE

A management work station with meeting area provided by a table propped on one end. This feature makes life more comfortable for the user of the desk when holding meetings because there is no need to leave the workspace.



FEATURES OF THE DESK

- 40-mm radius rounded corners.
- The storage space is a single module for CPU + shelf with space for cable management.
- There are three options for the drawer unit:
 - 4 drawers (3, 3, 3, 3).
 - 2 drawers + filing drawer (3, 3, 6).
 - 1 drawer + hinged door.

OPTIONAL DESK FEATURES

- 275-mm wide, metal flip-up cover with tray for power strip.

VIRA, MANAGEMENT DESK WITH PROPPED MEETING TABLE

MANAGEMENT DESK DESCRIPTION

STRUCTURE

The entire structure is degreased, washed and phosphated before being coated with 60/80µm epoxy powder and then polymerised. The powder coating complies with the current reaction to fire standard UNE 23827-90.

Side CPU space

Assembly made of 0.8-mm sheet steel, formed, folded and welded.

Parts joined with 3.9x13 mm sheet metal screws.

Ready to channel the cables up inside.

Side drawer unit

Shell in 0.8-mm sheet steel, folded and welded. The different drawer unit accessories (guides, drawers, drawer fronts, etc.) are added to the shell.


The fronts are available in:

- Metal.
- Wood with laminated finish.
- Varnished wood.

Both the CPU space and the drawer unit have a 40-mm side radius to coincide with the radius of the work top.

Modesty panel

Made of folded 0.8-mm sheet steel. Assemblies joined with 3.9x13 mm sheet metal screws.

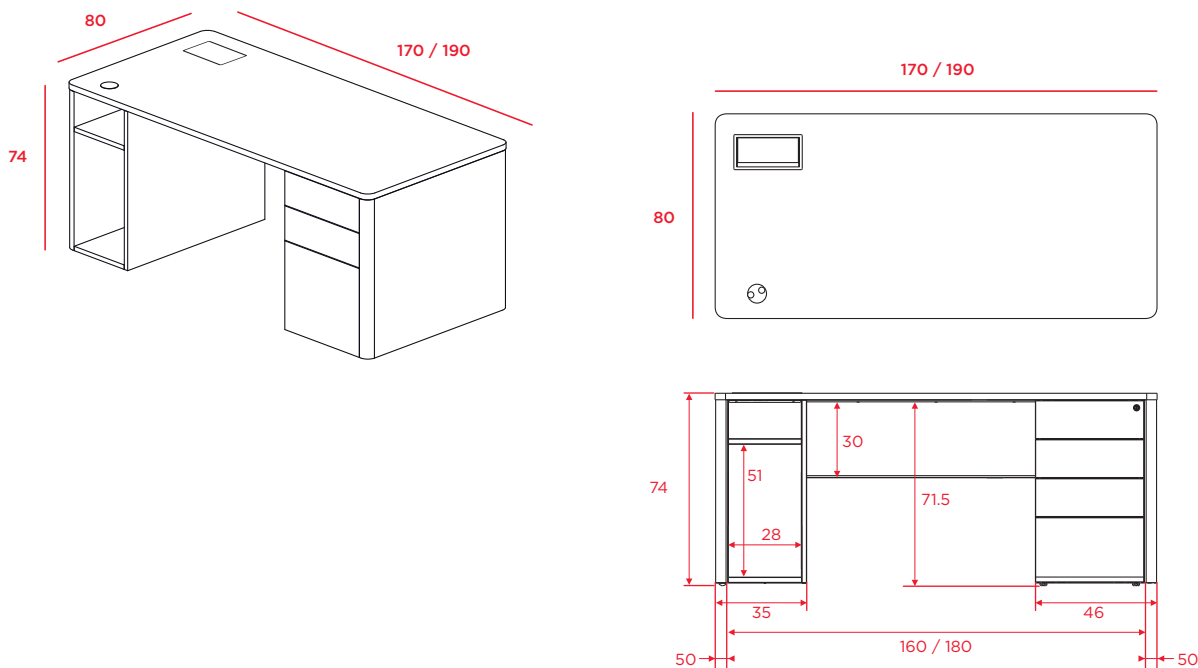

WORK TOP

25-mm thick chipboard bonded with synthetic resins and especially designed for applications that require high bending strength. Average density: 660/635 kg/m³ as per EN 323. Available in three finishes:

- Finished on top with 0.7-mm thick **HPL** as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm PVC edge as per UNE 56.843:01.
- **Laminated**. 2-mm PVC edge as per UNE 56.843:01.
- **Wood** treated with high-resistance varnish, with 2-mm thick wood edge.



VIRA, MANAGEMENT DESK WITH PROPPED MEETING TABLE

MEETING TABLE DESCRIPTION

WORK TOP

25-mm thick chipboard bonded with synthetic resins and especially designed for applications that require high bending strength. Average density: 660/635 kg/m³ as per EN 323. Available in three finishes:

- Finished on top with 0.7-mm thick **HPL** as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm PVC edge as per UNE 56.843:01.
- **Laminated**. 2-mm PVC edge as per UNE 56.843:01.
- **Wood** treated with high-resistance varnish, with 2-mm thick wood edge.

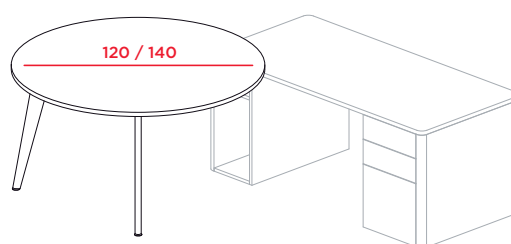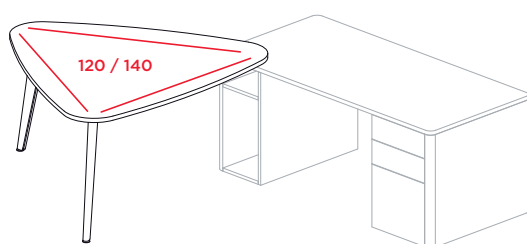


45° METAL LEG

The leg is a piece of 1.5-mm thick, formed sheet steel ending in a non-slip leveller to compensate for uneven floors. The crossbar joining the legs measures 50x30x1.5 mm.


45° WOODEN LEG

The leg is a piece of oak-finish wood. The crossbar joining the legs measures 50x30x1.5 mm.

METAL FLIP-UP COVER



TRAY




VIRA, MANAGEMENT DESK WITH PROPPED MEETING TABLE


MANAGEMENT DESK RANGE

H 74 W 170 F 80
 190


CPU STORAGE SPACE WITH SHELF +
HINGED DOOR AND DRAWER

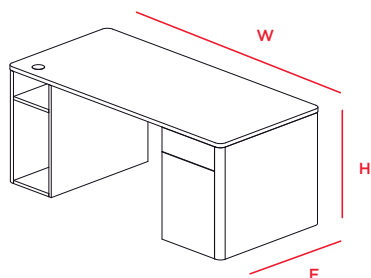

CPU STORAGE SPACE WITH SHELF +
3,3,3,3 DRAWER UNIT

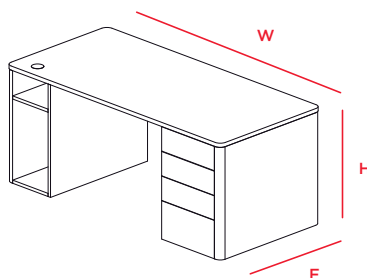


CPU STORAGE SPACE WITH SHELF +
3,3,6 DRAWER UNIT

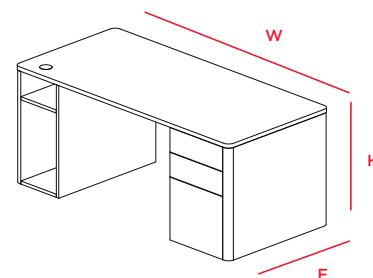


There are right- and left-hand desks. They are identified as shown.

LEFT-HAND DESK




RIGHT-HAND DESK



MEETING TABLE RANGE

TRIANGULAR MEETING TABLE

W 120
140

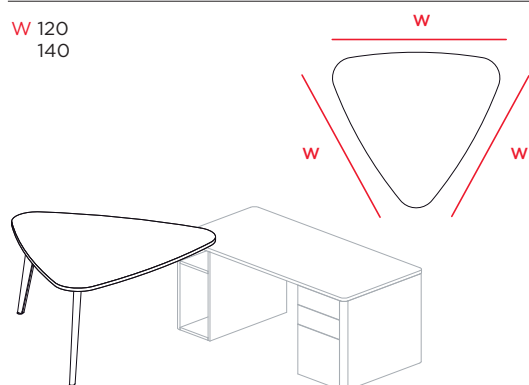

ROUND MEETING TABLE

W 120
140

