



VIRA MEETINGS


With its slanted wooden or metal legs as its hallmark and harmonious finishes, the friendly shapes of this work desk-cum-table follow the aesthetic of the current market.



OPTIONAL FEATURES

CABLE MANAGEMENT CHANNEL


► Independent table tray



Side cover	X= 334
400 cover	X= 509
800 cover	X= 909

ABS side covers in white (BA) and black (NE)

► Modular table channel with 2 height positions

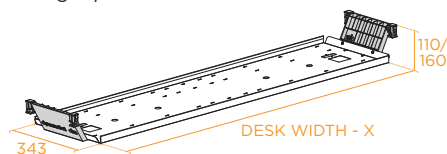

Middle desk	X= 268
Start/end desk	X= 468

TECHNICAL SHEET




OPTIONAL FEATURES

CHANNEL ACCESSES

► Side flip-open cover

Metal or same finish as work top
2-mm perimeter in black
Built-in sockets option




► Ø 60 cable grommet
Colour: white (BA) and black (NE)



► Central flip-open cover (double rotation)

Metal or same finish as work top
2-mm perimeter in black






► Ø 60 multi-connection socket



Colour: white (BA) and black (NE)
1 power socket + 1USB A + 1USB C
+ 20 cm cable ending in Wieland connector



Positioning:




Side cover



400 cover A≤1600

CABLE RISER


► Mesh




► Vertebrated



► Totem



► Access cover on middle leg



1-mm thick painted sheet metal



VIRA MEETINGS



DESCRIPTION

DESK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m³ as per EN 323.

- ▶ Laminated finish. 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished on top with 0.7-mm thick anti-fingerprint HPL as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished in wood treated with high-resistance varnish. 2-mm thick wood edge.



STRUCTURE

Metal frame built with two 1.5-mm thick 50x30 profiles.

End leg built with 1.5-mm thick 50x30 upper crossbar and leg to the ground. Option: 1.5-mm thick shaped sheet metal or in oak veneered beech wood. Ends in a leveller which can be adjusted by 20mm. Option: castor with brake d-65 mm.

Middle metal leg with leveller on the group work stations, built with inclined legs made of 1.5-mm thick 50x30 profile and two 1.5-mm thick 50x30 profiles welded to the leg.

60/80 micras epoxy powder coated that complies with current UNE 23827-90 reaction to fire regulations.

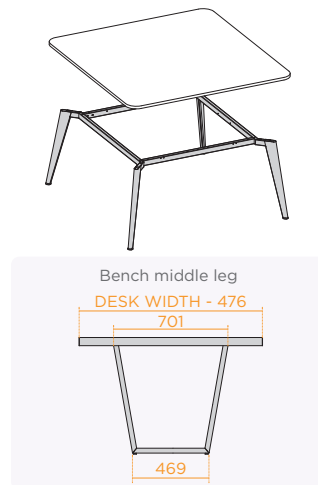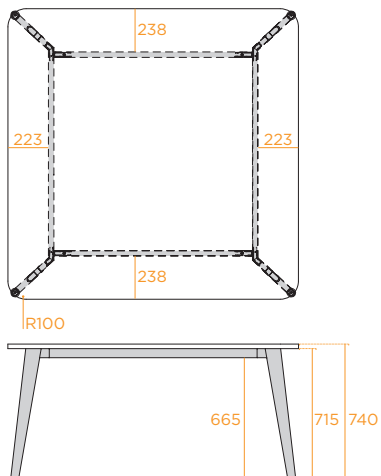

TECHNICAL SHEET



DETAILS



▲ SIDE FLIP-OPEN COVER



▲ CENTRAL FLIP-OPEN COVER
(double rotation)



▲ CHANNEL ACCESS
Ø 60 multi-connection
socket



▲ CHANNEL



▲ TRAY



▲ MIDDLE LEG
With access cover




CERTIFICATES






RANGE

INDEPENDENT TABLE



W \ F	100	120	140	160	180	200	220	240
80	● ▲	● ▲	● ▲	● ■ ▲	● ■ ▲	● ▲		
90	●	●	●	●	● ■	●		
100	●	●	●	●	●	● ■	●	
120		●	●	●	●	●	●	● ■
140			●	●	●	●	●	●
160				● ■ ▲	● ▲	● ▲	● ▲	● ▲

MODULAR TABLE

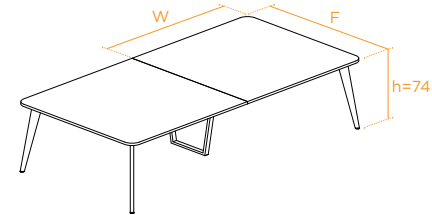

W \ F	120	140	160	180	200	220	240
120	●	●	●	●	●	●	● ■
140		●	●	●	●	●	●
160			● ■	●	●	●	●

KEY

PRICE TERMS

- GENERAL
- EXPRESS

AVAILABLE OPTIONS

- With castors
- ▲ h=90/105